MODULMAT

Electrolytic Etch Marking Systems

The Modulmat series marking systems are completely self contained and ready for semi-automatic operation. These compact units contain the marking controls (EU Classic 300 or 500), a pneumatic top marking head assembly, electrolyte pumping system, and securing fixtures for stencils and products to be marked. The Modulmat is suitable for marking products with metallic, electrically conductive surfaces. A dosing feed system ensures that the electrolyte cannot escape outside the marking area.

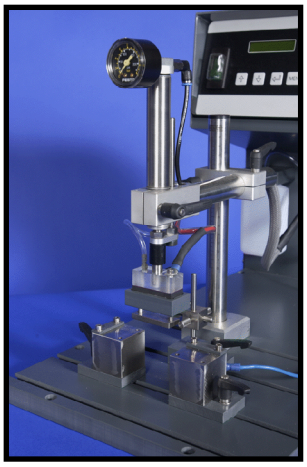

Advantages

- Non-corrosive electrolytes
- Non-smearing permanent marking
- Digital controls and display
- No part deformation

Specifications

Input Voltage	115 or 230 V AC
Output Voltage	0 - 30 V (AC/DC)
Power	310 / 510 VA
Air Pressure	6 bar
Dimensions	410 x 308 x 690 mm

Special Accessories

- Rotary device for 360º marking
- Double marking (above and below)
- Special marking heads
- Rotary switch table
- Time lapse
- Counter

Ostling Technologies
P.O. Box 917
Chillicothe, Ohio 45601
Phone: 740-779-9918 Fax: 740-779-9910
email: sales@permanentmarking.com